

**MODEL 05603C** WIND SENSOR INTERFACE 0-5 VDC OUTPUT

# INTRODUCTION

The Wind Sensor Interface provides calibrated analog DC voltage signals for wind speed and wind direction. The unit consists of a circuit board assembly in a weather resistant junction box. All cable connections are made in the junction box. See wiring diagram below.

#### **IMPORTANT!**

The Wind Sensor Interface provides a calibrated voltage output signal for wind speed and wind direction. Externally connected devices should be reviewed for compatibility and correct signal scaling.

Repairs should be attempted only by qualified service personnel.

### WARRANTY

This product is warranted to be free of defects in materials and construction for a period of 12 months from date of initial purchase. Liability is limited to repair or replacement of defective item. A copy of the warranty policy may be obtained from R. M. Young Company.

# **CE COMPLIANCE**

89/336/EEC

Date / Place:


Dank

David Poinsett

This product has been tested and shown to comply with European CE requirements for the EMC Directive. Please note that shielded cable must be used.

### **SPECIFICATIONS**

Power Requirement:	8-24 VDC (5 mA @ 12 VDC)
Temperature Range:	-50 to 50°C (-58 to 122°F)
Inputs: Wind Speed Wind Direction	YOUNG Wind Monitor series of sensors AC sine wave, Frequency proportional to wind speed. 3 pulses per revolution. Input sensitivity nom. 40 mV p-p Analog voltage from azimuth potentiometer. Excitation is supplied from interface circuit to
	potentiometer.
Outputs:	
Wind Speed	0 to 5.00 VDC = 0 to 100 M/S
Wind Direction	Circuit time constant 0.2 second 0 to 5.00 VDC = 0 to 360°
Overall accuracy:	± 1% of full scale over temperature and supply voltage range
Dimensions:	110 mm W x 75 mm H x 56 mm D (4.3 in W x 2.9 in H x 2.2 in D)
Mounting:	U-bolt for vertical pipe 25-50mm (1.2 in) Dia

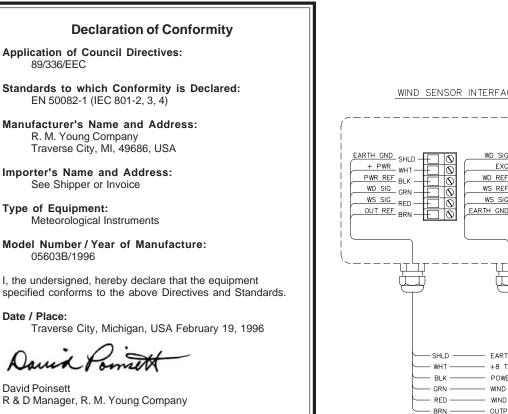

WIND SENSOR INTERFACE WD SIG GRN EXC WHT WD REF BLK WS REF BLU WS SIG RED EARTH GND SHLD EARTH GROUND +8 TO +24 VDC POWER POWER REFERENCE WIND DIRECTION VOLTAGE OUTPUT (0-5 VDC)

WIND SENSOR

R. M. YOUNG COMPANY 2801 Aero Park Drive, Traverse City, Michigan 49686 USA TEL: 231-946-3980 FAX: 231-946-4772

<sup>-</sup> WIND SPEED VOLTAGE OUTPUT (0-5 VDC) OUTPUT REFERENCE

